




**Ground lug**  
 6/32 x 1/4L Screw  
 0.31" square surface  
 Brass, Nickel plate



Conductor cross section solid min.0.2 mm<sup>2</sup>  
 Conductor cross section solid max.1.5 mm<sup>2</sup>  
 Conductor cross section AWG min.24  
 Conductor cross section AWG max.16  
 Stripping length 8 mm

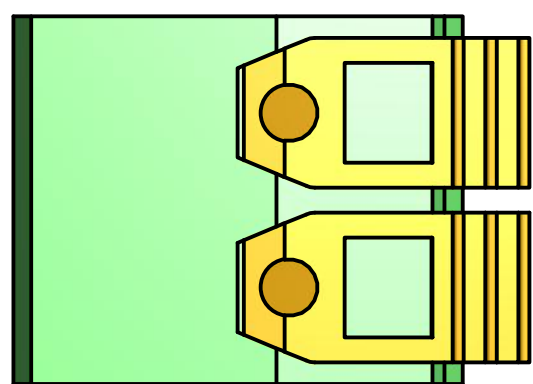

Conductor cross section AWG min.24  
 Conductor cross section AWG max.10  
 Conductor cross section min.0.2 mm<sup>2</sup>  
 Conductor cross section max.6 mm<sup>2</sup>  
 Stripping length 12 mm  
 Rated surge voltage (III/3) 8 kV

DRAWN Sheilon	02/06/2015			
CHECKED				
QA		IsoBlock Q-4		
MFG		SIZE	DWG NO	REV
APPROVED		C		
		SCALE	SHEET 1 OF 1	